


RIDGID SeeSnake MAX **1/1/200 Series**

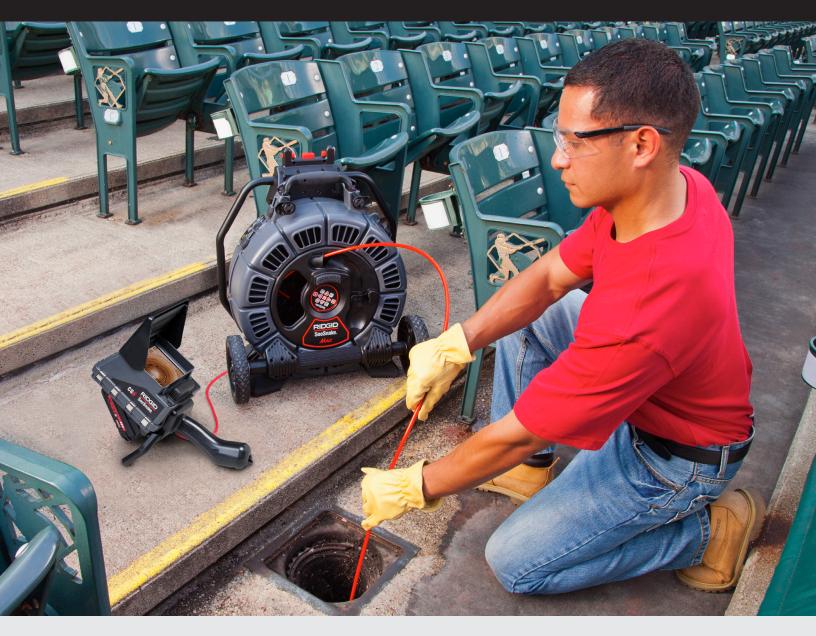

The rM200 Camera System combines portability with the versatility of the D2 drum series, offering different combinations of push cable stiffness and spring flexibility to tackle any inspection job.

Interchangeability

- The D2 drum series currently consists of the D2A and D2B drums
- The rM200 comes with your choice of drum
 - Either drum can be purchased separately
 - Own them both; quickly and easily interchanged giving you on-the-job flexibility

Pushability

- Drums feature different push cable lengths, diameters, stiffness and springs
- Chose the drum that enables you to easily negotiate turns and tees there's a drum that's right for you!

Portability

- Easy to transport; via its wheels or carry handle
- Dock the CS6 or CS65 digital monitor for convenient transport, operation and storage





SPECIFICATIONS

	rM200A	rM200B
System Weight	36.3 lb (16.5 kg)	39.2 lb (17.8 kg)
Drum Weight		19.2 lb (8.7kg)
• Drum Diameter		17" (43.2 cm)
• Camera	,	,
View	Self-leveling	Self-leveling
Length		1" (2.6 cm)
Diameter		1" (2.5 cm)
Light		6 LEDs
• Sonde		
Frequency	512 Hz	512 Hz
 Resolution 		
NTSC	656 x 492 Pixels	656 x 492 Pixels
PAL	768 x 576 Pixels	768 x 576 Pixels
 Spring Assembly 		
Туре	Single	Dual Nested
Length	12" (30.8 cm)	17" (43.3 cm)
 Push Cable 	, ,	,
Length	200' (61 m)	165' (50 m)
Diameter		0.35" (0.90 cm)
Fiberglass Core Diamete	er0.14" (0.36 cm)	0.18" (0.45 cm)
Minimum Bend Radius	2.8" (7.1 cm)	3.5" (8.9 cm)
Pipe Capacity*	1.5" to 8"	2" to 8"
	(3.8 cm to 20.3 cm)	(5.1 cm to 20.3 cm)

^{*}When used with a 5" (12.5 cm) pipe guide.

ORDER INFORMATION

rM200B Reel Catalog No. 47528

CATALOG NO.	MODEL NO.	DESCRIPTION		GHT (kg)
42348	rM200A	Reel, SeeSnake MAX rM200A w/D2A Drum	36.3	16.5
47528	rM200B	Reel, SeeSnake MAX rM200B w/D2B Drum	39.2	17.8
47548	rM200	Drum, rM200 D2A	16.4	7.4
47538	rM200	Drum, rM200 D2B	19.2	8.7





rM200 D2A Drum Catalog No. 47548



rM200 D2B Drum Catalog No. 47538